




# EZG<sup>®</sup>

Manufacturing

## Grout Hog<sup>®</sup> Delivery Systems

### Model GPH75

- Will deliver up to 3/4" (1.9 cm) aggregate
- Unloads 3/4 cu.yd. (.57 m<sup>3</sup>) in approx. 2 1/2 minutes
- GX390 11.7 HP Honda<sup>®</sup> engine with electric start (optional diesel engine or electric motor available)
- Unique swivel-base system allows workers to reach 17 ft. (5.2 m) of wall quickly without moving forklift
- 8 ft. (2.44 m) reinforced, collapsible dispensing hose (standard)
- Crane bail option available
- Removable auger allows for 15 minute clean up

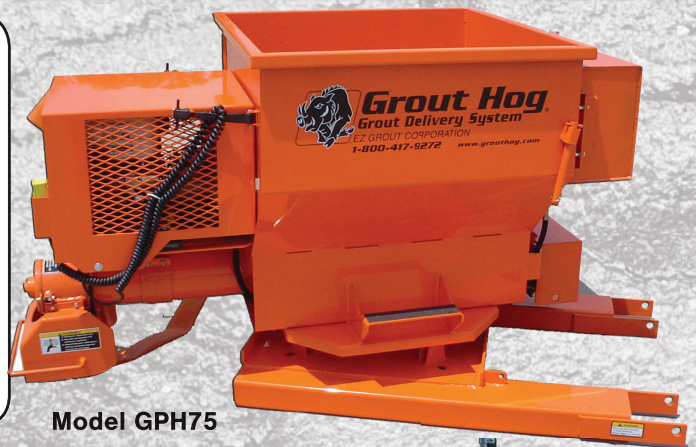

Model GPH75



A wireless remote option is available on gas powered units.

### Model GH75

- Hooks to auxiliary hydraulics of forklift
- Will deliver up to 3/4" (1.9 cm) aggregate
- Unloads 3/4 cu. yd. (.57 m<sup>3</sup>) in approx. 2 1/2 minutes
- Delivers sand and dry materials
- Unique swivel-base system allows workers to reach 17 ft. (5.2 m) wall quickly without moving forklift
- 8 ft. (2.44 m) reinforced, collapsible dispensing hose (standard)
- Hydraulic shut off allows for easy control of high slump or SCC concrete
- Removable auger allows for 15 minute clean up



Model GH75

## Who We Are

For close to 20 years, we have honed our precision metal fabrication services. With roots in the contracting industry, CEO Damian Lang started the EZ Grout equipment line to improve the efficiency on his own masonry job sites. Since then, EZG Manufacturing has expanded to include precast, refractory, cleaning, and fencing equipment along with it's award winning EZ Grout equipment line. We also have our custom fabrication and design shop to meet all of your unique needs.

## Model UPGH75

- Will deliver up to 1/2" (1.27 cm) aggregate
- Makes grouting from the scaffold side of the wall easier
- Unloads 3/4 cu. yd. in 2 1/2 minutes
- Removable auger and hopper tilt allows for 15 minute clean up
- Extended auger tube saves several feet of boom extension on your forklift
- Decreased head height allows pouring up close to bar joist on interior walls
- Unique swivel base allows grouting from all angles while eliminating extra forklift moves.
- 8 ft. (2.44 m) reinforced, collapsible dispensing hose standard
- Pendant cable control operation (forward and reverse); optional wireless remote



**Model UPGH75**

## Tracy Kiser, Kiser Masonry

"Our company has three Grout Hog's that we work with. We purchased our first Grout Hog about 10 years ago and still use it on our jobsites. Our most recent purchase was the Uphill Grout Hog and it was definitely a great addition to our fleet. We really can tell the increase in production time when using these products."



**Model UGPHC75**  
Shown with optional gas power and crane bail

Model	GH75	GPH75	GPHC75	UGH75	UGPH75	UGPHC75
<b>Machine Type</b>	Horizontal Auger	Horizontal Auger	Horizontal Auger	Uphill Auger	Uphill Auger	Uphill Auger
<b>Lifting Bale</b>	N/A	N/A	Standard	N/A	N/A	Standard
<b>Capacity - cu. yd. (m³)</b>	3/4 (0.57)	3/4 (0.57)	3/4 (0.57)	3/4 (0.57)	3/4 (0.57)	3/4 (0.57)
<b>Material Discharge</b>	3/4 yd³ in 2 1/2 minutes	3/4 yd³ in 2 1/2 minutes	3/4 yd³ in 2 1/2 minutes	3/4 yd³ in 2 1/2 minutes	3/4 yd³ in 2 1/2 minutes	3/4 yd³ in 2 1/2 minutes
<b>Power Source</b>	Auxiliary	Honda GX390 11.7 HP (8.7kw)	Honda GX390 11.7 HP (8.7kw)	Auxiliary	Honda GX390 11.7 HP (8.7kw)	Honda GX390 11.7 HP (8.7kw)
<b>Aggregate Size in. (cm)</b>	3/4 (1.9)	3/4 (1.9)	3/4 (1.9)	1/2 (1.3)	1/2 (1.3)	1/2 (1.3)
<b>Hyd. Flow Rate gpm@2000psi</b>	10	10	10	10	10	10
<b>Empty Weight lb. (kg)</b>	990 (449)	1436 (651)	1525 (692)	1055 (479)	1475 (669)	1565 (710)
<b>Gross Weight lb. (kg)</b>	4010 (1819)	1436 (2012)	4525 (2053)	4055 (1839)	4475 (2030)	4565 (2071)
<b>Dimensions L x W x H in.</b>	81 x 42 x 48	81 x 42 x 48	81 x 42 x 66	98 x 48 x 48	98 x 48 x 48	98 x 48 x 66



1-800-417-9272 | ezgmfg.com  
1833 North Riverview Road  
Malta, OH | 43758

