




## Technical Data Sheet

### Description

The patented TotalFlash Panel Cavity Wall Drainage Solution is a complete, factory-assembled masonry cavity wall flashing system. It combines a flashing membrane with a mortar dropping collection drainage mat, weep tabs, drip edge and termination bar into a single, easy-to-install panel.

### Features

- Sold in boxes of 10 pre-assembled 5' 6" panels (5' net/panel, 50' net/box)
- 90% open-weave polyester mesh mortar dropping collection mat and weep tabs
- 18" standard height
- Additional available sizes: 12", 24" (Custom sizes available on request)
- Customizable with 5 membranes, 6 drip edges, and 3 term bars
- FREE takeoff service, custom panel sizing, and bid and installation help on awarded projects

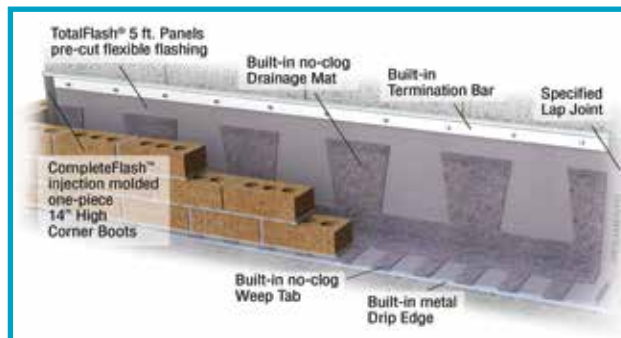

### Sizes and Packaging

STANDARD THICKNESS	PANEL HEIGHT	PANEL LENGTH	# OF PANELS/BOX
0.040"	12"	5-1/2' (5' net)	10 panels/box
0.040"	18"	5-1/2' (5' net)	10 panels/box
0.040"	24"	5-1/2' (5' net)	10 panels/box

- 1 starter strip for left-to-right installation per box
- 100 self-tapping #14 x 2" termination bar screws per box

### Recycled Content

MATERIAL	RECYCLED CONTENT
Drainage mat/weep tabs	40% Pre-consumer
PVC termination bar	100% Pre-consumer
Thermoplastic vinyl membrane	55% Pre-consumer
Stainless steel drip edge	80% Post-consumer
Kynar® drip edge	23% Post-consumer



## Technical Data Sheet

### Components Options

- Flashing membranes
  - Thermoplastic Vinyl: UV Stable
  - Rubberized Asphalt: 0.032" rubberized asphalt bonded to 0.008" polyethylene film, self-adhering, excellent tensile/elongation/permanence characteristics, temperature resistant to 245° F
  - Copper Laminate: 5 oz. Copper sheet reinforced with 2 layers of fiberglass fabric
  - Thermoplastic Polyolefin (TPO): UV stable, ozone resistant, chlorine-free, recyclable
  - EPDM synthetic rubber
- Termination bars
  - PVC: 1.125" high x 0.120" thick x 10' 0" long, UV stabilized, non-migratory plasticizers, high strength, corrosion resistant, predrilled holes
  - Stainless Steel: 0.750" high x 16 gauge thick x 10' 0" long, 1/4" lip, pre-drilled holes 6" on-center, 100% recyclable
  - Stainless Steel: 1.25" high x 16 gauge thick x 59-5/8" long, 1/2" lip, predrilled holes 6" on-center, 100% recyclable
- Drip edges
  - Stainless Steel: 3.0" high x 28 gauge, 3/8" hemmed edge, 100% recyclable
  - Cold-rolled Copper: 3.0" high x 24 gauge, 3/8" hemmed edge, 100% recyclable
  - Kynar®-coated galvanized steel: 3.0" high x 24 gauge, 3/8" hemmed edge, 4 color choices (Almond, Tan, Gray, Terra-cotta)
  - No drip edge: Membrane edge exposed

### Available Options Sold Separately

- CompleteFlash® - TPO, or synthetic rubber/polypropylene blend
  - 14" High inside/outside Corner Boots
  - End Dams: right, left, universal
- Metal Drip Edge Corners
  - Pre-formed outside 90°
  - Adjustable 325° to 22°
- Sealants
  - BTL-1 Butyl